a round controller for a round world GM10 Basic



The Columbus AGM 10 climate controller is an advance easy to use 10 stage controller developed specially for poultry raising.

The Columbus have a color touch screen for easy operation with help of its ICON operation system .

The Columbus can operate 1 Heater, Minimum ventilation, Tunnel ventilation total 6 fan group, Cooling and Light.

The Columbus have option for silo weighing, Bird weighing, Co2 control as well humidity control.


The Columbus have a automatic temperature reduction curve.

The Columbus have a USB port for transfer of all its set point to other Columbus controller on the farm for easy set up.

The Columbus will collect information as temperature, humidity, water consumption, feed consumption. (option bird weighing silo weighing)

The Columbus will show the collect info for the whole growing period in table and graphs on its color display.

The Columbus display can be translated into any languish.

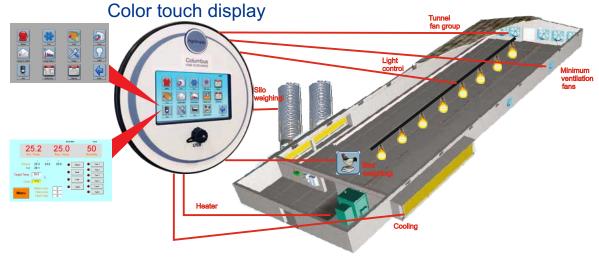

The Columbus AGM 10 climate controller can be ordered for various application as a OEM product .

To the standard model AGM Basic the following equipment can be connected:

Up to 2 Silo weigher, 2 bird weigher, humidity sensor, Co2 sensor, Static pressure sensor.

Columbus AGM 10 Basic

The Columbus AGM 10 basic climate controller have the following function:

1 Heater, 6 Fan group, 1 Cooling, 1Light timer 1 Alarm for high and low temperature.

The first group is the minimum ventilation group include a on/off timer. It is possible to set that the minimum fan group will rotate between the 6 fan group so each time another fan group will be the minimum ventilation group to give a even air flow in the house.

The Cooling have a on/off timer, If a humidity sensor is connected it is possible to stop the cooling when the humidity is high by a set point.

If the humidity is over a humidity set point a additional fan will be activated.

An automatic temperature curve will deduct the requested temperature for the whole growing period.

Columbus AGM 10 **Technical specification**

- 110 to 260 volt operation.
- 4 analog input for temperature sensor.
- 3 digital input for water count feed count feed back from inlet.
- 2 0 to 10 volt out for light dimmer and speed control.
- 1 Isolated RS 485 for optional silo weigher.
- 1 RS 485 for additional sensor as Humidity, CO2, Temperature sensors, Static pressure sensor, Bird weigher,
- 1 USB port.

Columbus AGM 10 Basic output



info@technocon-eng.com www.agro-matic.com